



MC500-31

产品手册

PRODUCT MANUAL



MC500-31

L1410×W450×H270mm

潜伏牵引型AGV，磁导航、单向前进，RFID地标、PBS传感器。

1. 车身低矮，可以进入低矮的料架底下牵引；
2. 潜伏牵引可以使转弯半径缩小，占地面积小；
3. 驱动单元一键电动升降，方便维护；
4. 最多可以指定1024个站点，安全防护更加到位。

under-driven & towing magnetic navigation based, one-way forward, RFID landmark, PBS sensor

1. Low body design and can be towed under the low frame ;
2. under-driven& towing can reduce the turning radius and allows for a small footprint .
3. Maintenance friendly on One-key electric lift of the drive unit
4. Up to 1024 specified sites , and more secure .

技术参数 CHARACTERISTIC




MC500-31
L1410×W450×H270mm

型号 Model	AGV-31-MC500	
基本功能 Basic skills	潜伏牵引 under-driven & Towing	
自身重量 Weight	150 kg	
载重能力 Capacity	≤500 kg	
导引方式 Direction	磁导航 magnetic navigation based	
行走方向 Drive	前进 Forward	
驱动方向 Drive mode	2WD	
前进速度 Forward speed	≤32m/min	
爬坡能力 Climbing ability	≤2%	
最小转弯半径 Minimum turning radius	R700mm	
尺寸 Dimension	L1410×W450×H270mm	
电机 Motor	类型 Type	DC无刷电机 DC brushless motor
	输出功率 Output power	100Wx2
控制方式 Control	工控机控制 Industrial computer control	
驱动模组 Drive module	驱动轮 Drive wheel	Φ 130聚氨酯 Polyurethane
蓄电池 Accumulator	DC24V、80AH (铅酸电池 Lead acid battery)	
充电方式 charging mode	离线充电 (24V 2组) brush-less motor	

产品视图 VIEW

JATEN 嘉腾

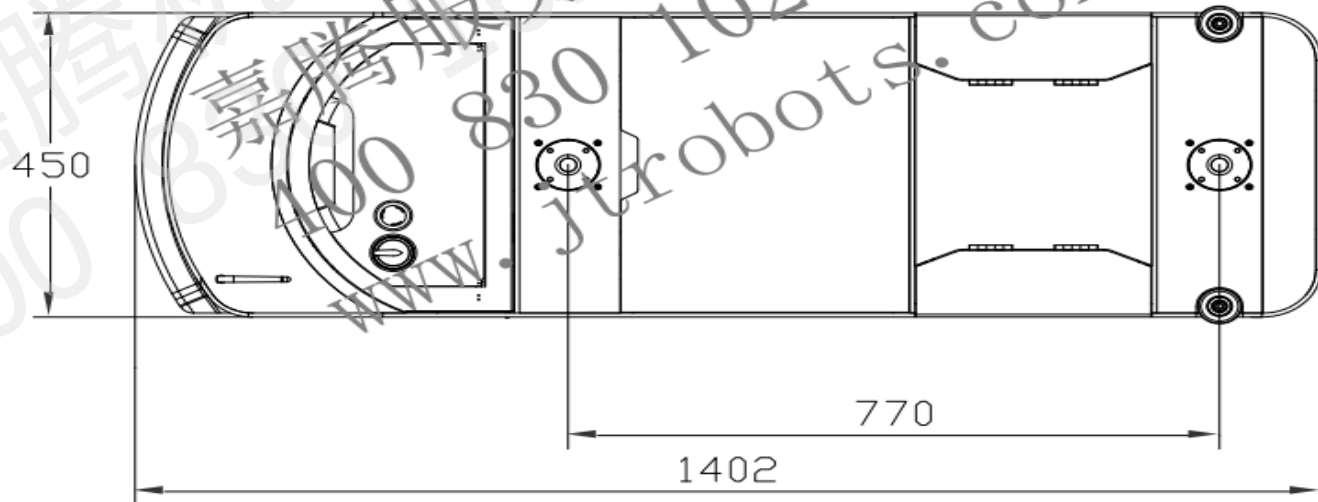

MC500-31

L1410×W450×H270mm



实现在火星上搬运与救援
We aim to carry and rescue on Mars



微信公众号
WeChat



微信客服
WeChat Service

服务热线 Toll Free

400-830-1028

邮箱 Email

Marketing@jtrobots.com

官网 Website

www.jtrobots.com